










TECHNICAL INFORMATION  
SERIAL NO. 10000000000000000000  
MOTOR DATA  
VOLTAGE 230V  
H.P. 1/2  
R.P.M. 1725  
INSULATION CLASS. F  
DIP. PROTECT. IP54  
MOTOR TYPE 100L  
MOTOR CODE 100L




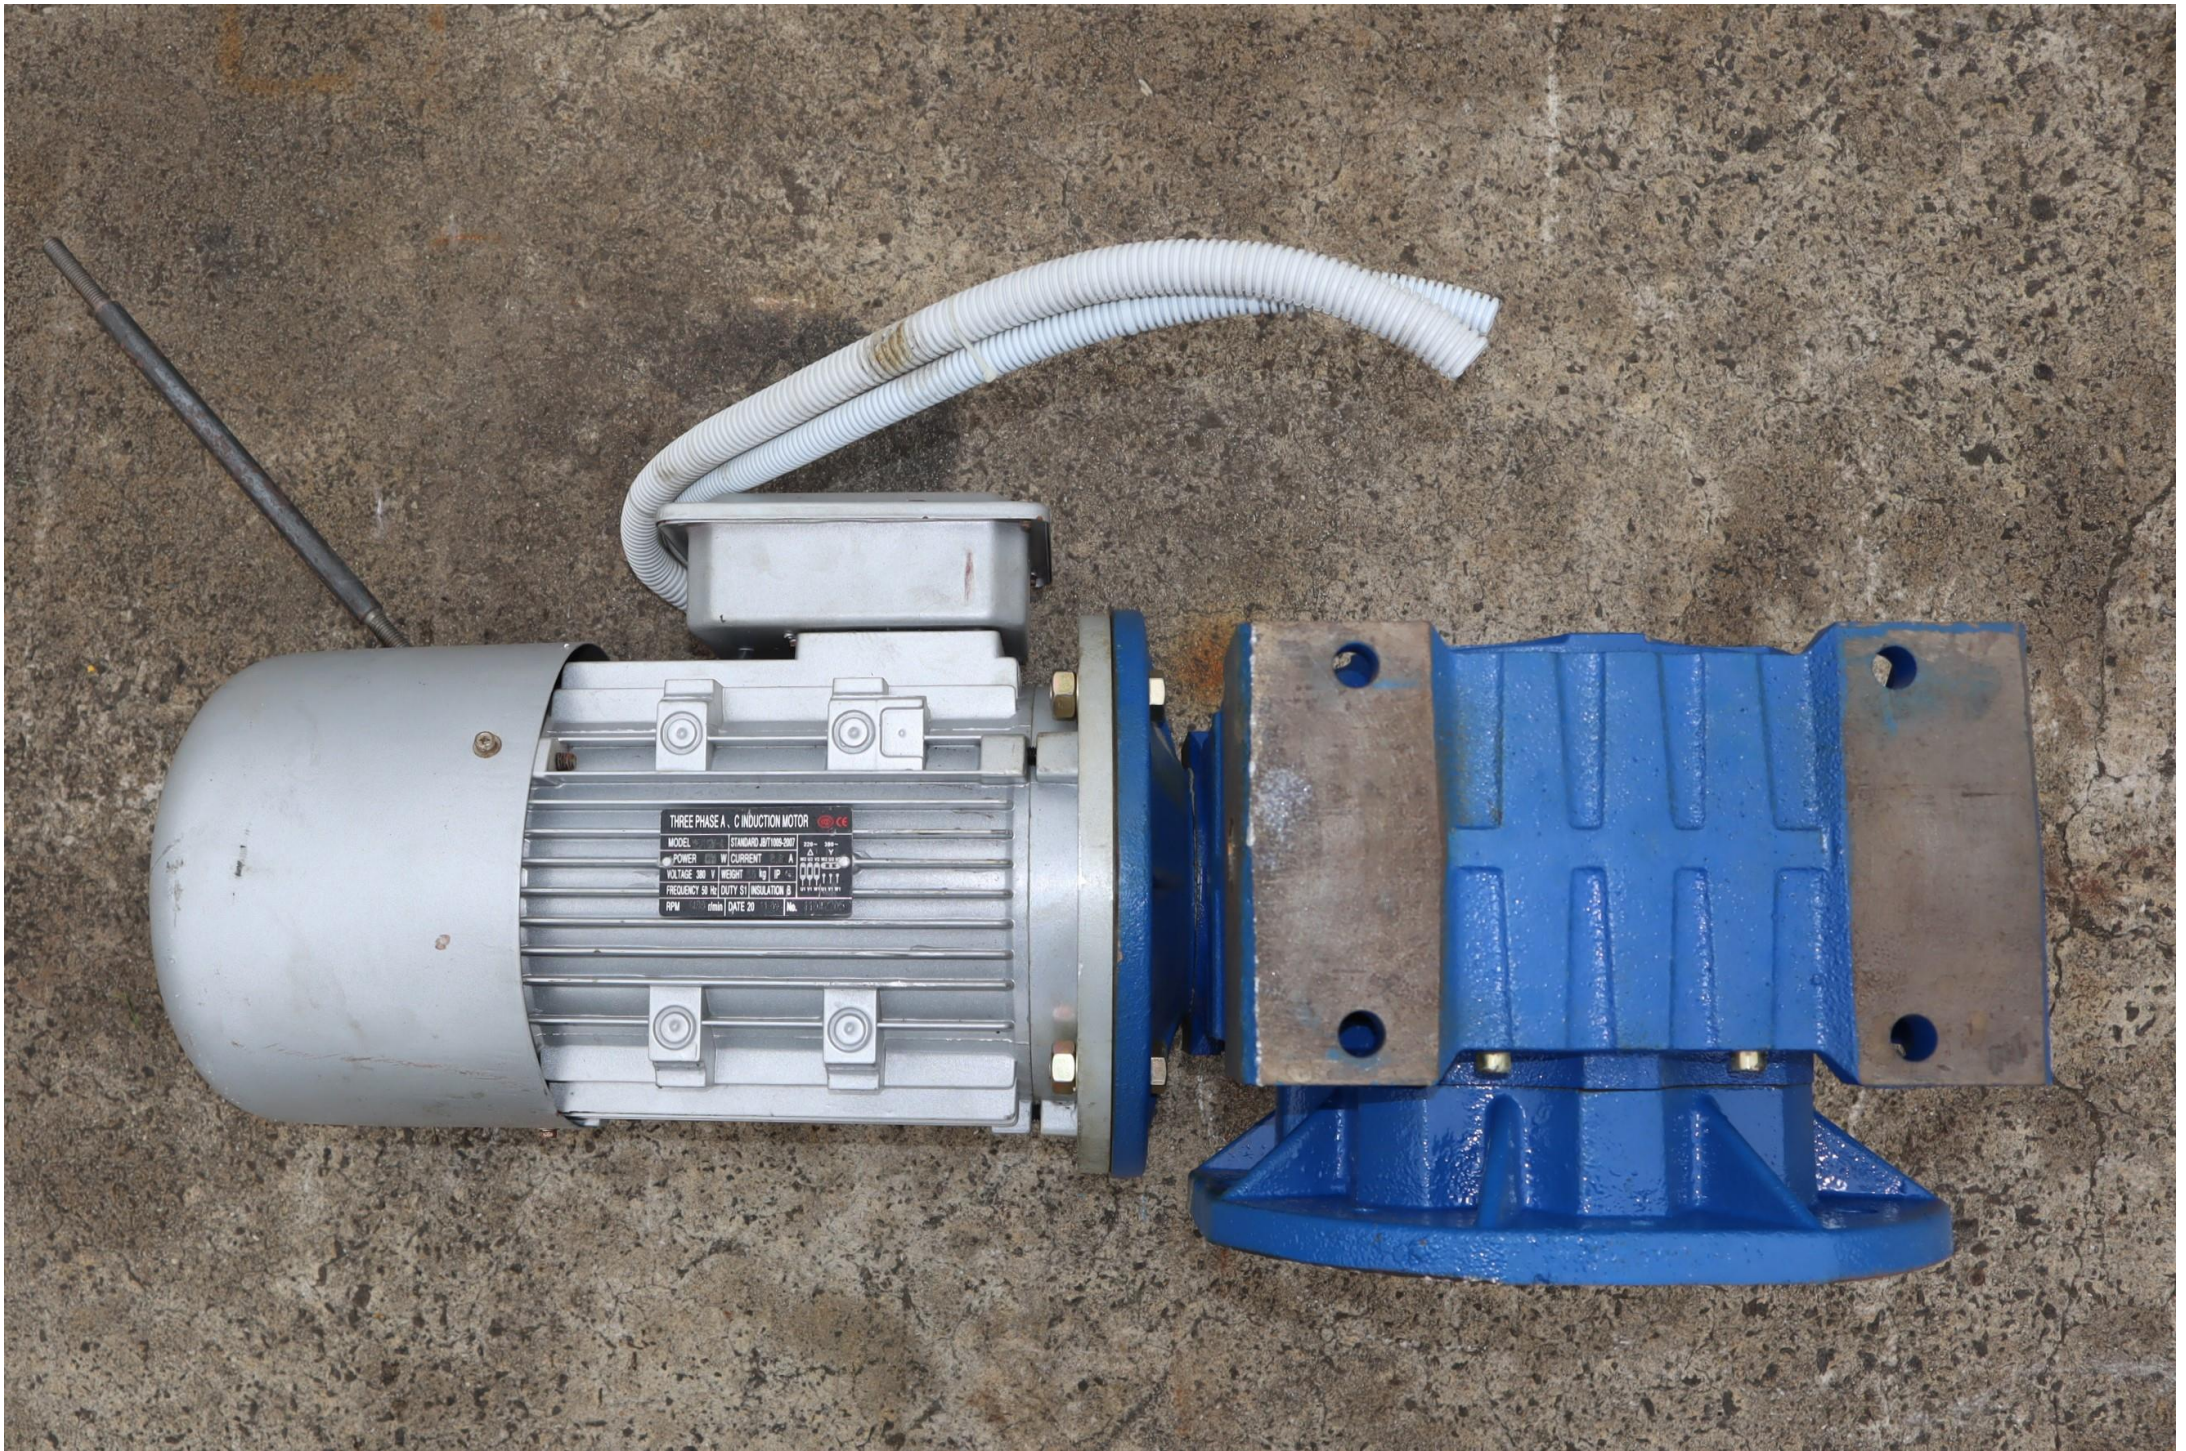


THREE PHASE A. C INDUCTION MOTOR

MODEL	STANDARD	BT100S-200	100	100
POWER	HP	CURRENT	A	100
VOLTAGE	V	HEIGHT	mm	100
FREQUENCY	50 Hz	INSULATION	B	100
FFM	DATE	20	No.	100



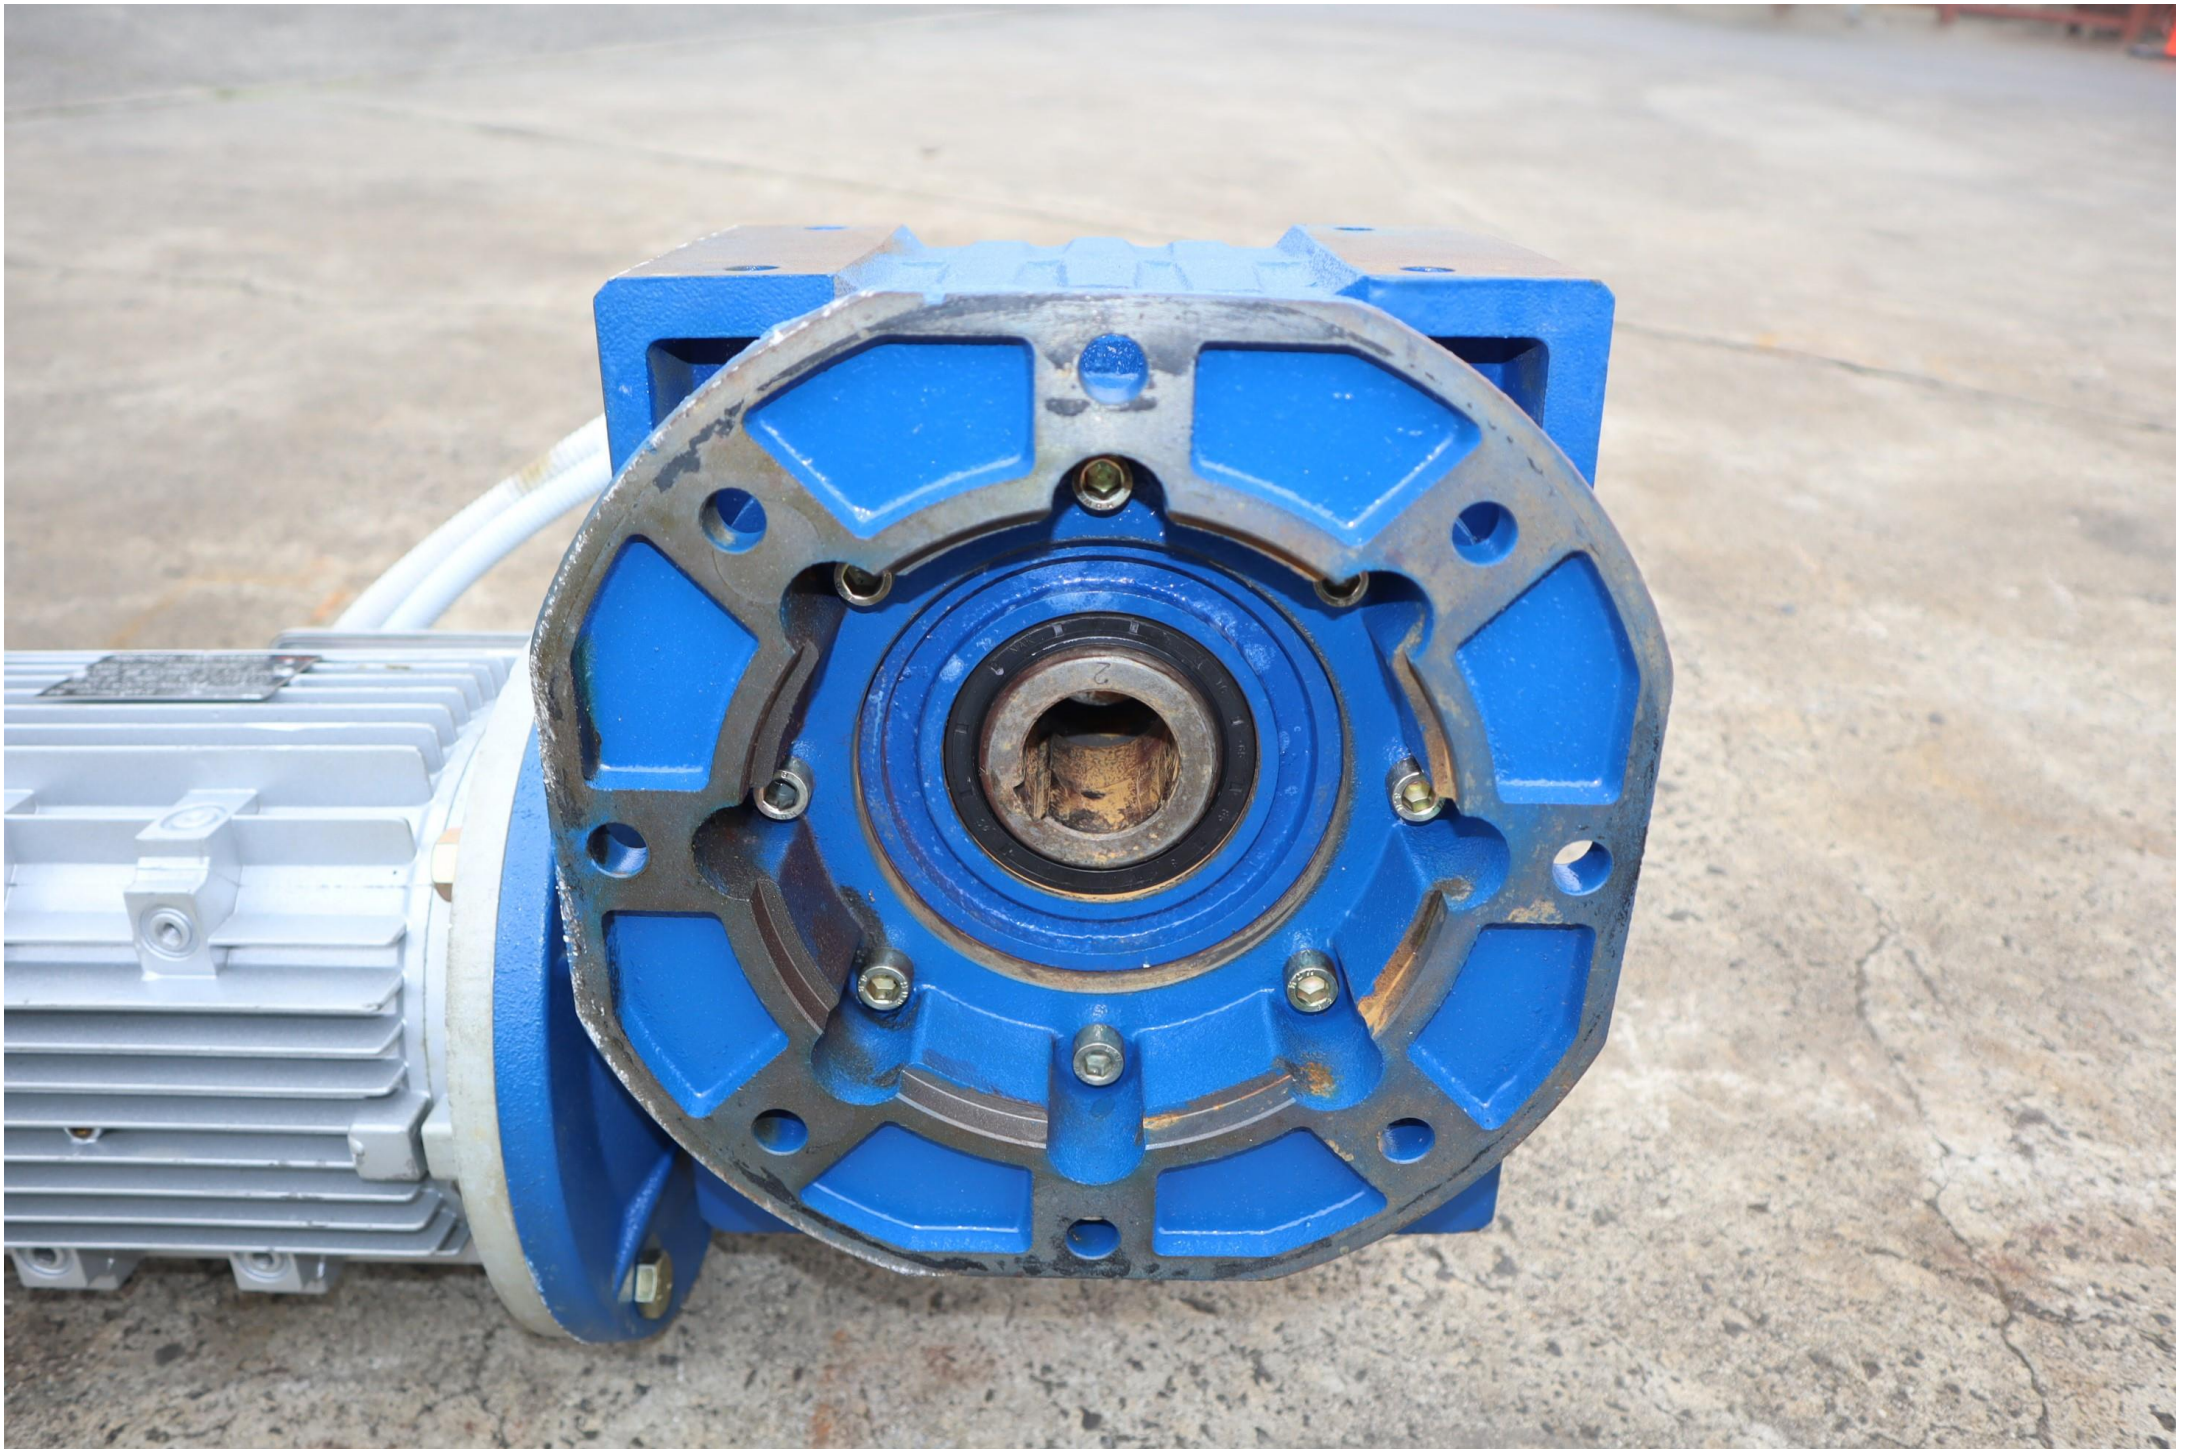




THREE PHASE A, C INDUCTION MOTOR 

MODEL	Y310L4	STANDARD	JB/T1009-2007	220~	380~
POWER	0.75 W	CURRENT	8.8 A	$\Delta$	$Y$
VOLTAGE	380 V	WEIGHT	30 kg	W2 U2 V2	W2 U2 V2
FREQUENCY	50 Hz	DUTY	S1	INSULATION	B
RPM	1400 r/min	DATE	20 11 09	No.	11042205





THREE PHASE A、C INDUCTION MOTOR



MODEL <b>YB112H-4</b>	STANDARD JB/T1009-2007	220~ 380~
POWER <b>400 W</b>	CURRENT <b>8.8 A</b>	$\Delta$ Y
VOLTAGE <b>380 V</b>	WEIGHT <b>30 kg</b>	W2 U2 V2 W2 U2 V2
FREQUENCY <b>50 Hz</b>	DUTY <b>S1</b>	INSULATION <b>B</b>
RPM <b>1400 r/min</b>	DATE <b>20 11 09</b>	No. <b>11042205</b>

U1 V1 W1 U1 V1 W1