






VDE 0530  
IEC 60034 MADE IN BRAZIL

3 ~ 160M

06APR04 BM36138

IP55 Ins. cl. F  $\Delta$  180 K S1 FS1.15 AMB 40°C

V	Hz	kW	min <sup>-1</sup>	A	cos $\phi$
380 $\Delta$	50	11	1450	22.0	0.85
660 Y			1450	12.7	0.85
400 $\Delta$	50	11	1455	21.0	0.84
690 Y			1455	12.2	0.84
415 $\Delta$	50	11	1460	20.8	0.82
440 $\Delta$	60	12.5	1750	21.6	0.85
460 $\Delta$			1755	21.0	0.83

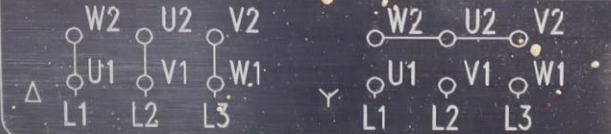

POLYREX EM-ESSO  
13 g 20000 h

114 kg

MODEL MTE30 STD

60033



THERMISTOR/TERMISTOR (PTC)

Max. measuring voltage = 2,5 Vdc

Max. tensão de teste = 2,5 Vdc

155°C



0362-0387











**ROBUSCH**® CE  
Parma  
Italy

TYPE RVS 21/30  
SN 04-01929 4009

m <sup>3</sup> /h	4
PI	1
mbar	10
l/cm	100

316

TRON





3214479110  
3214470300  
5200







ROBUSCH

ROBUSCH® CE