

Catalogue No: **EKSS 20104-316**

ENCLOSURE F/STANDING 316 S/STEEL IP66 H2000 x W1000 x D400mm

Enclosures and Climate Control > Standard Enclosures > Floor Standing Enclosures > Floor Standing Enclosures - Stainless Steel > Stainless Steel - EKSS (Single Door Fully Welded) > 2000mm High



Enclosure Floor Standing 316 Stainless Steel IP 66 H2000xW1000xD400mm

- Fully welded with IP66 and IK10 protection resulting in exceptional strength and rigidity
- Large range of stainless steel accessories including plinths, baying kits, fan covers, rain hoods, lifting devices and locks to fully support and configure the enclosure
- Removable rear panel gives easy access to the enclosure
- Comprehensive standards and approvals including CE, GL, KEMA, UL and Lloyd's Register

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	EKSS Compact (Single Door)
Material, Body / Housing	Stainless Steel, 316L material
Material thickness, body / housing	1.5 mm
Finish, body / housing	240s Pre-Grained (0.5 microns average) body/housing
Details, body / housing	One piece enclosure body. Integrated depth profiles with hole pattern allowing mounting plate adjustable in depth.
Height	2000 mm
Width	1000 mm
Depth	400 mm
Weight	135 kg
Material, door	Stainless Steel, 316L
Material thickness, door	2 mm
Finish, Door	240s Pre-Grained (0.5 microns average) door
Details, door	Mounted with four hinges allowing left or right hand opening. Includes door frame with 25mm hole pattern.
Material, Mounting Plate / Bracket	Zinc Galvanized Steel
Material Thickness, Mounting Plate / Bracket	2.7 mm
Details, Mounting Plate / Bracket	Double folded and slides into position. Adjustable in depth by steps of 25mm with the MPD02 accessory. Supplied outside of the enclosure packaging.
Material, Gland Plate	Stainless Steel, 316L
Material Thickness, Gland Plate	1.5 mm
Details, Gland Plate	One piece with injected polyurethane gasket to ensure maximum sealing.
Roof Panel	N/A
Rear Panel	1.5mm steel. Fitted by M6 torx screws. Standard facilities for rear door mounting.
Material, Gasket / Seal	PUR / PU material

Catalogue No: **EKSS 20104-316**

ENCLOSURE F/STANDING 316 S/STEEL IP66 H2000 x W1000 x D400mm

Enclosures and Climate Control > Standard Enclosures > Floor Standing Enclosures > Floor Standing Enclosures - Stainless Steel > Stainless Steel - EKSS (Single Door Fully Welded) > 2000mm High



Details, earthing	All panels are earthed through their fittings and are equipped with a separate earthing stud.
IP Rating	IP66
IK Rating	IK10
Lock Type	DIN - 4 Point Locking type
Diameter, Lock	3 mm
Material, Lock	Plastic material
NEMA Enclosure Class (NEMA 250:2003)	Type 4X Type 4 Type 12
Bayable?	No
Door Load Capacity	75 kg
Enclosure Load Capacity	575 kg
Standards Compliance	NEMA 250:2003
Certifications	CE C-UL KEMA UL
Shipping Approvals	Lloyd's Register of Shipping


REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **EKSS 20104-316**

ENCLOSURE F/STANDING 316 S/STEEL IP66 H2000 x W1000 x D400mm

Enclosures and Climate Control > Standard Enclosures > Floor Standing Enclosures > Floor Standing Enclosures - Stainless Steel > Stainless Steel - EKSS (Single Door Fully Welded) > 2000mm High

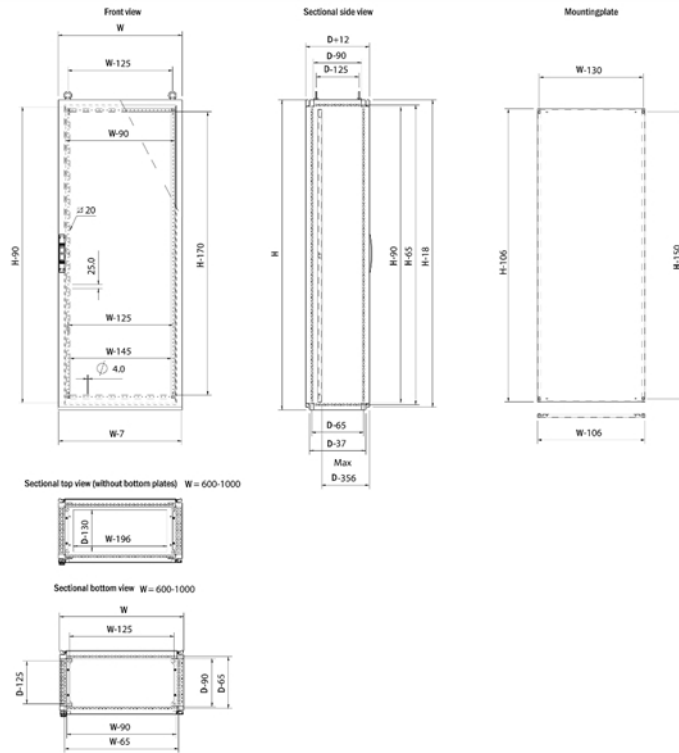

Dimension Diagram